


HEAVY DUTY COPPER TUBE TERMINALS



2A-M

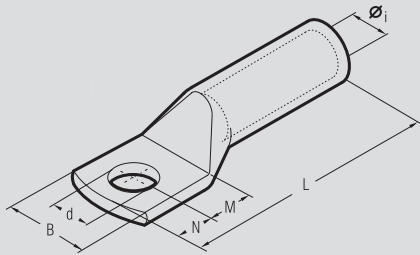

Conductor Size sqmm	Ø Stud mm	Ref.	Dimensions mm						Quantity Box/Bag	Mechanical Tools	Hydraulic Tools			
			Øi	B	M	N	L	d						
16	8	2 A 3-M 8	5,8	15,0	9	8	43,5	8,4	600/100	HN 5				
	10	2 A 3-M 10	5,8	18,0	11	10	47,5	10,5	500/100					
25	8	2 A 5-M 8	7,0	15,0	9	8	51,0	8,4	500/100	TN 70 SE				
	10	2 A 5-M 10	7,0	18,0	11	10	55,0	10,5	300/50					
	12	2 A 5-M 12	7,0	21,0	14	12	60,0	13,2	300/50					
35	8	2 A 7-M 8	8,9	17,0	9	8	53,0	8,4	250/50	TN 120 SE				
	10	2 A 7-M 10	8,9	19,0	11	10	57,0	10,5	250/50					
50	12	2 A 7-M 12	8,9	21,0	14	12	62,0	13,2	250/50	HT 45-E				
	10	2 A 10-M 10	10,0	20,0	11	10	63,0	10,5	200/50					
	12	2 A 10-M 12	10,0	21,0	14	12	68,0	13,2	200/50					
	14	2 A 10-M 14	10,0	25,0	16	14	72,0	15,0	150/50					
63	16	2 A 10-M 16	10,0	26,0	18	16	76,0	17,0	150/50	HT 51 RH 50 B 51				
	10	2 A 14-M 10	11,3	21,0	11	10	70,0	10,5	100/50					
	12	2 A 14-M 12	11,3	22,0	14	12	75,0	13,2	100/50					
70	14	2 A 14-M 14	11,3	25,0	16	14	79,0	15,0	100/50	HT 81-U RHU 81				
	16	2 A 14-M 16	11,3	26,0	18	16	83,0	17,0	100/50					
	10	2 A 19-M 10	13,5	25,0	11	10	76,5	10,5	75/25					
	12	2 A 19-M 12	13,5	25,0	14	12	81,5	13,2	75/25					
95	14	2 A 19-M 14	13,5	25,0	16	14	85,5	15,0	75/25	HT 120 and tools and heads with 130 kN crimping force ECW-H3D RHU 520				
	16	2 A 19-M 16	13,5	27,0	18	16	90,5	17,0	75/25					
	20	2 A 19-M 20	13,5	29,5	22	20	97,5	21,0	75/25					
	10	2 A 24-M 10	15,2	28,5	11	10	82,0	10,5	50/25					
120	12	2 A 24-M 12	15,2	28,5	14	12	87,0	13,2	50/25					
	14	2 A 24-M 14	15,2	28,5	16	14	91,0	15,0	50/25					
	16	2 A 24-M 16	15,2	28,5	18	16	95,0	17,0	50/25					
	20	2 A 24-M 20	15,2	30,0	22	20	103,0	21,0	50/25					
125	10	2 A 30-M 10	16,7	31,5	13	11	92,0	10,5	50/25					
	12	2 A 30-M 12	16,7	31,5	16	14	98,0	13,2	50/25					
	14	2 A 30-M 14	16,7	31,5	18	16	102,0	15,0	30/15					
	16	2 A 30-M 16	16,7	31,5	19	17	104,0	17,0	30/15					
150	20	2 A 30-M 20	16,7	31,5	22	20	110,0	21,0	30/15					
	12	2 A 37-M 12	19,2	35,5	16	14	108,0	13,2	30/15					
	14	2 A 37-M 14	19,2	35,5	18	16	112,0	15,0	30/15					
	16	2 A 37-M 16	19,2	35,5	19	17	114,0	17,0	30/15					
185	20	2 A 37-M 20	19,2	35,5	22	20	120,0	21,0	30/15					
	12	2 A 48-M 12	21,1	39,0	16	14	109,0	13,2	25/5					
	14	2 A 48-M 14	21,1	39,0	18	16	113,0	15,0	25/5					
	16	2 A 48-M 16	21,1	39,0	19	17	115,0	17,0	25/5					
240	20	2 A 48-M 20	21,1	39,0	22	20	121,0	21,0	25/5					
	12	2 A 60-M 12	23,7	44,0	20	14	129,5	13,2	20/5					
	14	2 A 60-M 14	23,7	44,0	22	16	133,5	15,0	20/5					
	16	2 A 60-M 16	23,7	44,0	22	19	136,5	17,0	20/5					
300	20	2 A 60-M 20	23,7	44,0	24	23	142,5	21,0	20/5					
	12	2 A 80-M 12	27,0	51,0	22	19	140,0	13,2	15/5					
	14	2 A 80-M 14	27,0	51,0	22	19	140,0	15,0	15/5					
	16	2 A 80-M 16	27,0	51,0	22	19	140,0	17,0	15/5					
400	20	2 A 80-M 20	27,0	51,0	24	23	146,0	21,0	15/5					
	16	2 A 100-M 16	30,3	56,5	22	19	147,0	17,0	10/5					
	20	2 A 100-M 20	30,3	56,5	24	23	153,0	21,0	10/5					
600-630	16	2 A 120-M 16	33,4	61,5	22	19	159,0	17,0	20/5					
	20	2 A 120-M 20	33,4	61,5	24	23	165,0	21,0	20/5					
800	20	2 A 160-M 20	38,0	72,0	24	23	187,0	21,0	12/3					
1000	20	2 A 200-M 20	44,0	80,0	24	23	202,0	21,0	6/2					

2A-M series are made from high purity copper tube, and are annealed. They feature a double length barrel for enhanced electrical and mechanical performance in heavy duty applications.

The absence of an inspection hole prevents the entry of water or moisture into the crimped joint making these terminals suitable for outdoor applications.

The terminals are electrolytically tin plated to prevent atmospheric corrosion. 2A-2M series terminals with double stud hole palm are available against specific requirements.